



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

03425156.1

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**

THIS PAGE BLANK (USPTO)  
PAGE BLANK (USPTO)



Anmeldung Nr:  
Application no.: 03425156.1  
Demande no:

Anmeldetag:  
Date of filing: 14.03.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

STMicroelectronics S.r.l.  
Via C. Olivetti, 2  
20041 Agrate Brianza (Milano)  
ITALIE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

A phase-locked loop circuit with switched-capacitor conditioning of the control current

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H03L/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

THIS PAGE BLANK (USPTO)  
THIS PAGE BLANK (USPTO)

The present invention relates to a Phase-Locked Loop (PLL) circuit.

A PLL is a fundamental component of many electronic systems (for example, in telecommunication applications).

5 The PLL consists of a negative feedback circuit that allows multiplication of the frequency of a reference signal by a selected conversion factor; this results in the generation of a tunable and stable output signal with the desired frequency.

10 Typically, the PLL includes a frequency divider that scales the frequency of the output signal by the conversion factor. The resulting signal is fed back to a phase comparator, which detects a phase difference between the feedback signal and the reference signal; the phase  
15 comparator outputs a control current indicative of the phase difference. A loop-filter integrates the control current into a corresponding voltage, which controls the frequency of the output signal accordingly. In a lock condition, the frequency of the feedback signal matches the frequency of  
20 the reference signal; therefore, the frequency of the output signal will be equal to the reference frequency multiplied by the conversion factor.

A problem of the structure described above is that different spurious signals (or spurs) can be generated  
25 during operation of the PLL. This problem is particularly acute in PLLs with a fractional architecture, wherein a dividing ratio of the frequency divider changes dynamically in the lock condition (so as to provide an average conversion factor equal to a fractional number); the  
30 fractional PLL allows finer resolution of the output frequency, and it exhibits improved performance in terms of

both settling time and phase noise. However, the change in the dividing ratio causes fractional spurs at low-frequency offsets from a carrier that are multiple of the periodicity in the division pattern.

5        In order to remove the spurs generated during operation of the PLL, different techniques for conditioning the control current have been proposed in the last years.

For example, a solution known in the art for reducing the effects of the non-linearity of the phase comparator  
 10        consists of sinking a direct current (DC) from an output node of the phase comparator. In this way, the PLL locks when the control current that is injected into the loop-filter during every cycle (consisting of a series of width-modulated pulses, indicative of the phase difference between  
 15        the feedback signal and the reference signal) matches the current that is sunk, so that the average current provided to the loop-filter is zero. As a consequence, in the lock condition the reference signal and the feedback signal have the same frequency, but a pre-defined phase difference  
 20        (thereby forcing the phase comparator to work in a part of its I/O characteristic that is more linear).

Another conditioning technique is routinely used in fractional PLLs for compensating a phase error, which is caused by the fact that in the lock condition the feedback  
 25        signal and the reference signal are not instantaneously at the same frequency. For this purpose, a compensation current (consisting of a series of amplitude-modulated pulses) is sunk from the output node of the phase comparator. Each pulse of the compensation current has the same area as the  
 30        corresponding pulse of the control current, so that in the lock condition the average current provided to the loop-

filter during every cycle is zero.

A drawback of the solutions described above is that they increase the level of reference spurs at an offset around the carrier that is equal to the reference frequency. This is due to the fact that, although zero on the average, the current injected into the loop filter in the lock condition has an instantaneous value that is different from zero. As a consequence, the control voltage output by the loop filter exhibits a ripple at the operative frequency of the phase comparator.

It is an object of the present invention to overcome the above-mentioned drawbacks. In order to achieve this object, a circuit as set out in the first claim is proposed.

Briefly, the present invention provides a phase-locked loop circuit for providing an output signal having a frequency depending on the frequency of a reference signal, the circuit including means for deriving a feedback signal from the output signal, means for providing a control signal indicative of a phase difference between the reference signal and the feedback signal, means for controlling the frequency of the output signal according to the control signal, and means for conditioning the control signal through at least one conditioning signal, wherein the means for conditioning includes means for accumulating an energy provided by the control signal and the at least one conditioning signal during a first phase and for transferring the accumulated energy to the means for controlling the frequency of the output signal during a second phase.

Moreover, a corresponding synthesizing method is also encompassed.

Further features and the advantages of the solution according to the present invention will be made clear by the following description of a preferred embodiment thereof, given purely by way of a non-restrictive indication, with  
5 reference to the attached figures, in which:

Figure 1 shows the functional blocks of a PLL in which the invention is applicable,

Figure 2a is a schematic representation of a particular of the PLL,

10 Figure 2b is a simplified time diagram describing operation of the PLL,

Figure 2c depicts an alternative structure of the particular of the PLL,

15 Figures 3a and 3b show different implementations of the invention.

With reference in particular to Figure 1, a digital PLL 100 of the fractional type is shown. The PLL 100 is used to synthesize an output signal  $V_o$  with a desired frequency  $F_o$ . The output signal  $V_o$  is obtained multiplying a frequency  $F_r$   
20 of a reference signal  $V_r$  by a selected conversion factor (consisting of a fractional number defining a channel of operation of the PLL 100); the reference signal  $V_r$  is typically generated by a quartz oscillator (not shown in the figure), which provides a stable and accurate time base.

25 For this purpose, the PLL 100 implements a feedback loop through a multi-modulus divider 105, which derives a signal  $V_b$  (having a frequency  $F_b$ ) from the output signal  $V_o$ . Operation of the multi-modulus divider 105 is defined by a nominal value  $N$  (representing an integer component of the  
30 conversion factor). Assuming that the PLL 100 is implemented with a standard accumulator, the block 105 divides the



frequency  $F_o$  of the output signal  $V_o$  by a dividing ratio that takes the values  $N$  or  $N+1$  alternatively, according to a modulation bit  $x$ . The modulation bit  $x$  is provided by an overflow terminal of an accumulator 110 (clocked by the  
5 signal  $V_b$ ). A first input of the accumulator 110 receives a further external signal  $K$ ; the parameter  $K$  is an adjusting value consisting of an integer varying from 0 to a modulus  $M$ , equal to the capacity of the accumulator 110 (with the value  $K/M$  that represents a fractional component of the  
10 conversion factor). A second input of the accumulator 110 is directly connected to its output. The signal  $V_b$  resulting from the division performed by the block 105 is fed back to a Phase Frequency Detector (PFD) 115.

The PFD 115 detects a phase difference between the  
15 feedback signal  $V_b$  and the reference signal  $V_r$  either lower than  $\pm 2\pi$  radians or higher than  $\pm 2\pi$  radians (commonly referred to as frequency difference). The PFD 115 outputs a phase-indicator up-signal  $S_u$  and a phase indicator down-signal  $S_d$ , which are used to control a charge pump 120.  
20 Typically, the charge pump 120 includes a high-side leg (referred to a power supply voltage  $+V_{dd}$ ) and a low-side leg (referred to ground). The high-side leg consists of a current generator 121h (providing a current  $I_h$ ), which is connected in series to an electronic switch 122h; likewise,  
25 the low-side leg consists of a current generator 121l (providing a current  $I_l$ ), which is connected in series to an electronic switch 122l. The switch 122h and the switch 122l are controlled by the up-signal  $S_u$  and by the down-signal  $S_d$ , respectively. The high-side leg and the low-side leg are  
30 connected to each other, and define an output node of the charge pump 120 that supplies a current  $I_p$ .

As described in detail in the following, the content of the accumulator 110 represents a correction value  $N_c$  (for example, consisting of 4 bits). The correction value  $N_c$  is provided to a servo Digital-to-Analog Converter (DAC) 125 (clocked by the reference signal  $V_r$ ). The servo-DAC 125 converts the correction value  $N_c$  into a corresponding compensation current  $I_c$ , which is sunk from the output node of the charge pump 120. Moreover, a current generator 130 (for example, referred to the power supply voltage  $+V_{dd}$ ) provides a direct linearization current  $I_o$ ; the linearization current  $I_o$  is further sunk from the output node of the charge pump 120.

A resulting control current  $I_{pc} = I_p - I_c - I_o$  is injected into a conditioning block (COND) 135. The conditioning block 135 accumulates the energy provided by the control current  $I_{pc}$ ; the accumulated energy is then transferred to a loop filter 140. The loop filter 140 removes the high frequency components of the control current  $I_{pc}$ ; the control current  $I_{pc}$  is then integrated into a corresponding voltage  $V_c$  (every period of the reference signal  $V_r$ ). The control voltage  $V_c$  drives a Voltage Controlled Oscillator (VCO) 145, which provides the output signal  $V_o$ .

During operation of the PLL 100, the VCO 145 starts oscillating at a free-run frequency as a consequence of background noise in the circuit. The block 105 divides the frequency  $F_o$  of the output signal  $V_o$  according to the adjusting value  $K$ . Particularly, in a fractional cycle consisting of  $M$  reference cycles,  $K$  times the frequency  $F_o$  of the output signal  $V_o$  is divided by  $N+1$  rather than by  $N$ . The average dividing ratio over the whole fractional cycle is then:

$$N^* = \frac{K(N+1) + (M-K)N}{M} = N + \frac{K}{M}$$

In an unlock condition (such as during an initial power up or immediately after a channel switching), the frequency Fb of the feedback signal Vb is different from the frequency Fr of the reference signal Vr. The up-signal Su is asserted upon detection of a raising edge of the reference signal Vr; in response thereto, the switch 122h is closed and the current Ih is injected into the output node of the charge-pump 120. Likewise, the down-signal Sd is asserted upon detection of a raising edge of the feedback signal Vb; the switch 122l is then closed and the current Il is sunk from the output node of the charge-pump 120. The PFD 115 is reset after a short delay from the assertion of both the signals Su and Sd (in order to compensate a dead-zone of the charge pump 120); as a consequence, the switches 122h, 122l are opened so as to cut off the corresponding currents Ih, Il. The charge-pump current Ip then consists of a series of pulses indicative of the phase difference between the signals Vb and Vr.

The corresponding control voltage Vc (disregarding the compensation current Ic and the linearization current Io for the time being) updates the frequency Fo of the output signal Vo accordingly (every reference cycle). Particularly, when the feedback frequency Fb is lower than the reference frequency Fr, the control voltage Vc instructs the VCO 145 to increase the output frequency Fo; conversely, when the feedback frequency Fb is higher than the reference frequency Fr, the control voltage Vc instructs the VCO 145 to reduce the output frequency Fo.

Similar considerations apply to any phase difference between the feedback signal Vb and the reference signal Vr.

The PLL 100 locks when the average frequency of the feedback signal  $V_b$  matches the frequency  $F_r$  of the reference signal  $V_r$ . In this condition, the frequency  $F_o$  of the output signal  $V_o$  is thus equal to  $F_r \cdot N^*$  (on the average).  
 : 5 Therefore, the PLL 100 delivers an output signal  $V_o$  with a frequency  $F_o$  having any desired value that is multiple of the frequency  $F_r$  of the reference signal  $V_r$ , according to the conversion factor  $N^* = N + K/M$ .

However, in the lock condition the feedback signal  $V_b$  and the reference signal  $V_r$  are not instantaneously at the  
 10 same frequency. Particularly, when the dividing ratio of the multi-modulus divider 105 is equal to  $N$ , the frequency  $F_b$  of the feedback signal  $V_b$  will be higher than the frequency  $F_r$  of the reference signal  $V_r$ ; therefore, their phase  
 15 difference increases. Conversely, when the dividing ratio of the multi-modulus divider 105 is equal to  $N+1$ , the frequency  $F_b$  of the feedback signal  $V_b$  will be lower than the frequency  $F_r$  of the reference signal  $V_r$ ; therefore, their phase difference decreases.

20 The current value of the phase error (between the feedback signal  $V_b$  and the reference signal  $V_r$ ) is available in the accumulator 110. In fact, the accumulator 110 sums the adjusting value  $K$  to itself continually. While the content of the accumulator 110 is lower than its capacity  $M$ ,  
 25 the frequency  $F_o$  of the output signal  $V_o$  is divided by  $N$ ; when the accumulator 110 overflows, the dividing ratio is incremented to  $N+1$ . For example, with  $K=5$  and  $M=16$  (meaning that the accumulator 110 consists of a counter at 4 bits), the content of the accumulator 110 every fractional cycle  
 30 will be:

5, 10, 15, 4(↑), 9, 14, 3(↑), 8, 13, 2(↑), 7, 12, 1(↑), 6, 11, 0(↑)

A total of 5 overflows occur, so that the average dividing ratio becomes the desired conversion factor  $N^* = N + 5/16$ .

The phase error between the feedback signal  $V_b$  and the reference signal  $V_r$  is  $2\pi K/M$  radians after the first reference cycle,  $2\pi \cdot 2K/M$  radians after the second reference cycle, and so on. When the accumulator 110 overflows, the frequency  $F_o$  of the output signal  $V_o$  is divided by  $N+1$ ; in this way, the phase error is decreased by a full cycle of the feedback signal  $V_b$  ( $2\pi$ ). More generally, denoting with  $i$  the content of the accumulator 110, the phase error is always  $2\pi \cdot i/M$ .

Therefore, it is possible to compensate the effects of the above-described phase error with a technique also known as phase interpolation. For this purpose, the content of the accumulator 110 (properly scaled) is converted into the corresponding compensation current  $I_c$  by the servo-DAC 125; the compensation current  $I_c$  is used to update the control current  $I_{pc}$  that is injected into the conditioning block 135 (and then provided to the loop-filter 140), in order to have a control voltage  $V_c$  that is constant in the lock condition.

The current generator 130 is instead used to reduce the effects of the non-linearity of a phase comparator formed by the PFD 115 and the charge pump 120. In fact, the phase comparator 115,120 has an input/output characteristic (plotting an output charge against an input phase difference) that significantly differs from an ideal straight line. The non-linearity in the I/O characteristic of the phase comparator 115,120 is generally higher when the phase difference between the feedback signal  $V_b$  and the reference signal  $V_r$  takes values near to zero.

In order to reduce the effects of that non-linearity,

the phase comparator 115,120 is forced to work in a linear part of its I/O characteristic; this result is achieved keeping the phase difference between the feedback signal  $V_b$  and the reference signal  $V_r$  different from zero in the lock condition. Particularly, the linearization current  $I_o$  (provided by the current generator 130) updates the control current  $I_{pc}$  that is injected into the conditioning block 135 (and then provided to the loop-filter 140). The PLL 100 locks when the total current provided to the conditioning block 135 in every cycle is zero. In this condition, the reference signal  $V_r$  and the feedback signal  $V_b$  have the same frequency, but a pre-defined phase difference corresponding to the value of the linearization current  $I_o$  (properly scaled).

However, the concepts of the present invention are also applicable when the PLL has another structure or includes equivalent elements; for example, the PFD can be replaced with a mixer or XOR-gates, or the positions of the current generators and of the switches in every leg of the charge pump can be reversed. Similar considerations apply if the PLL works with different operative parameters or if equivalent signals are envisaged. Alternatively, the accumulator is replaced with a second or higher order sigma-delta modulator or with a multi-bit modulator (with the addition of a control logic for calculating the correction value representing the current phase error).

The principle of operation of the conditioning block 135 is based on a switched-capacitor technique. A possible implementation of that principle is shown in Figure 2a.

Particularly, the conditioning block 135 includes one or more capacitors, which are represented schematically by

an element 205. The capacitive element 205 has a first terminal that is kept at a reference voltage (for example, ground). A second terminal of the capacitive element 205 is alternatively coupled with the charge pump 120 or with the loop-filter 140 (implemented with an active structure providing a virtual ground). For this purpose, one or more electronic switches (schematically represented by an element 210) are arranged between the charge pump 120 and the capacitive element 205; likewise, one or more further electronic switches (schematically represented by an element 215) are arranged between the capacitive element 205 and the loop-filter 140.

Every reference cycle, the switching elements 210 and 215 are alternatively opened and closed. Particularly, during a first phase (for example, consisting of half a period of the reference signal  $V_r$ ) the switching element 210 is close and the switching element 215 is open. As a consequence, the charge-pump current  $I_p$ , the compensation current  $I_c$  and the linearization current  $I_o$  charge the capacitive element 205. During a second phase (consisting of a further half-period of the reference signal  $V_r$ ) the switching element 210 is open and the switching element 215 is close. In this way, the capacitive element 205 discharges onto the (active) loop filter 140.

In the unlock condition, the control current  $I_{pc} = I_p - I_c - I_o$  has a mean value different from zero (during the first phase); therefore, the control current  $I_{pc}$  causes the accumulation of an electric charge (either positive or negative) in the capacitive element 205 at the end of the first phase. During the second phase, the accumulated charge is transferred to the loop filter 140, so as to provide a

corresponding control voltage  $V_c$ . Conversely, in the lock condition the control current  $I_{pc}$  is zero on the average. Therefore, the capacitive element 205 does not store any electric charge at the end of the first phase; therefore, 5 during the second phase no electrical charge is transferred to the loop filter (with the control voltage  $V_c$  that is always constant).

For example, as shown in the simplified time diagram of Figure 2b, the charge-pump current  $I_p$  consists of a series 10 of pulses; each pulse has a width corresponding to the phase difference between the feedback signal  $V_b$  and the reference signal  $V_r$  (with a constant amplitude). The feedback signal  $V_b$  and the reference signal  $V_r$  have a pre-defined phase difference at the beginning of every fractional cycle. The 15 phase difference then changes at every reference cycle, because of the phase error introduced by multi-modulus divider (with the phase difference that continually increases until the accumulator overflows).

The linearization current  $I_o$  has a constant amplitude 20 (corresponding to the desired phase difference); the linearization current  $I_o$  is effective only during the first phase (first half-period of the reference signal  $V_r$ ), so that it is represented with a dashed line during the second phase (second half-period of the reference signal  $V_r$ ). The 25 compensation current  $I_c$  consists of a series of pulses (for example, generated in response to the raising edges of the reference signal  $V_r$ ). Each pulse has a constant width (for example, equal to half a period of the reference signal  $V_r$ ); the amplitude of the pulse corresponds to the current phase 30 error.

In an ideal condition, the mean value of the control



current  $I_{pc}$  during every first phase is zero (i.e., the positive area is the same as the negative area). However, as shown in the figure, the instantaneous value of the control current  $I_{pc}$  is different from zero.

5        In the PLLs known in the art, the control current  $I_{pc}$  is directly injected into the loop-filter. The pattern of the control current  $I_{pc}$  (in the lock condition) has a periodicity equal to the fractional cycle. Therefore, the control current  $I_{pc}$  involves spurs at low-frequency offsets  
10 from a carrier  $V_0$ ; particularly, a very powerful spur appears at an offset equal to  $F_r$  from the carrier  $V_0$ . The spurs cannot be removed by the loop filter, since that would require a too narrow loop bandwidth (with an intolerable increase of a settling time and of a phase noise in the  
15 PLL).

Conversely, in the proposed solution no current is injected into the loop-filter during the first phase. In the meanwhile, the voltage at the capacitive element of the conditioning block (denoted with  $V$ ) increases when the  
20 control current  $I_{pc}$  is positive and decreases when the control current  $I_{pc}$  is negative. In this way, at the end of the first phase the voltage  $V$  is zero, so that no current is injected into the loop-filter during the second phase either. Therefore, the current provided to the loop-filter  
25 has an instantaneous value that is always zero.

An alternative implementation of the principle on which the present invention is based is shown in Figure 2c (the elements corresponding to the ones shown in the Figure 2a are denoted with the same references, and their explanation  
30 is omitted for the sake of simplicity). In this case, the capacitive element 205 is interposed between the switching

element 210 and the switching element 215. The condition block 135 further includes two additional switching elements 220 and 225. The switching element 220 has a first terminal that is kept at ground; a second terminal of the switching element 220 is connected to a node that is shared between the switching element 210 and the capacitive element 205. Likewise, the switching element 225 has a first terminal that is kept at ground; a second terminal of the switching element 225 is connected to a node that is shared between the switching element 215 and the capacitive element 205.

During the first phase, the switching elements 210,225 are close (while the switching elements 215,220 are open). As a consequence, the currents  $I_p$ ,  $I_c$  and  $I_o$  charge the capacitive element 205. During the second phase, the switching elements 210,225 are open and the switching elements 215,220 are close. In this way, the capacitive element 205 discharges onto the loop filter 140.

The proposed structure improves the performance of the conditioning block 135 (even if it requires more components for its implementation).

However, the concepts of the present invention are also applicable when the conditioning block has an equivalent structure, or when the charging and discharging of the capacitive element are controlled in another manner. Similar considerations apply if the pulses of the compensation current have a different width or are generated in another way (for example, in response to the raising edges of the feedback signal). Alternatively, the signals are modulated with different techniques, or the linearization current is replaced with periodic pulses corresponding to the desired phase difference (between the feedback signal and the

reference signal) in the lock condition.

A practical implementation of the present invention (based on a servo-DAC of the switched capacitor type) in a PLL using an accumulator is shown in Figure 3a. Particularly, the servo-DAC 125 includes a decoder 305 receiving the correction value  $N_c$ . The decoder 305 converts the binary representation of the correction value  $N_c$  into a thermometric code. The thermometric representation of the correction value  $N_c$  consists of a number of bits  $b_0$ - $b_{15}$  equal to its maximum value ( $2^4=16$  in the example at issue); the thermometric bits  $b_0$ - $b_{15}$  are of even weight, and each one corresponds to a possible level of the correction value  $N_c$ . The correction value  $N_c$  is represented setting to 1 all the thermometric bits  $b_0$ - $b_{15}$  up to the one corresponding to its value. For example, the correction value  $N_c=9$  is represented by the thermometric bits 0000000111111111.

The thermometric bits  $b_0$ - $b_{15}$  are provided to a scrambler 310. The scrambler 310 has an input terminal for each thermometric bit  $b_0$ - $b_{15}$ , and an even number of output terminals (each one providing a corresponding scrambled bit  $sb_0$ - $sb_{15}$ ). Each input terminal of the scrambler 310 is selectively connected to an output terminal according to either a random algorithm or a "barrel shift" algorithm. In the random algorithm, each thermometric bit  $b_0$ - $b_{15}$  is transferred to an output terminal selected in a pseudo-random way. Conversely, in the barrel shift algorithm the output terminals receive the thermometric bits  $b_0$ - $b_{15}$  at 1 along a wrap-around circular list; for example, the correction value  $N_c=7$  causes the setting of the scrambled bits  $sb_0$ - $sb_6$ , the next correction value  $N_c=11$  causes the setting of the scrambled bits  $sb_7$ - $sb_{15}$ ,  $sb_0$ - $sb_1$ , the further

next correction value  $N_c=4$  causes the setting of the scrambled bits  $sb_2-sb_5$ , and so on.

For each scrambled bit  $sb_0-sb_{15}$ , the servo-DAC 125 includes a block formed by a switch 315, a capacitor 320, a further switch 325, and an AND-gate 330. In detail, the capacitor 320 has a first terminal that is kept at a reference voltage (for example, at ground). The switch 315 connects a second terminal of the capacitor 320 to a power supply terminal (providing a voltage  $+V_{dd}$  or a voltage  $-V_{dd}$  according to the sign of the current corresponding to the correction value  $N_c$  that is to be injected into or sunk from, respectively, the loop filter 140). The switch 325 has a terminal connected to the second terminal of the capacitor 320. All the switches 325 have their other terminals that are connected together to a common node. The switch 325 is controlled by an enabling signal  $\Phi_1$ . The switch 315 is controlled by a signal output by the AND-gate 330, which receives the corresponding scrambled bit  $sb_0-sb_{15}$  and a different enabling signal  $\Phi_2$ .

The servo-DAC 125 further includes an operational amplifier 335. The amplifier 335 has a non-inverting input terminal that is kept at ground, and an inverting input terminal that is connected to the common node of the switches 325. A capacitor 340 is arranged between the inverting input terminal and an output terminal of the amplifier 335.

A switch 345 connects the output terminal of the amplifier 335 to the output node of the charge-pump 120; the switch 345 is controlled by the enabling signal  $\Phi_1$ . A further switch 350 connects the output terminal of the amplifier 350 to the loop-filter 140; the switch 350 is

controlled by the enabling signal  $\Phi_2$ .

The loop-filter 140 includes an operational amplifier 355 in an integrator configuration. The amplifier 355 has a non-inverting input terminal that is kept at ground, and an  
 5 inverting input terminal that is connected to the switch 350. A capacitor 360 is arranged between the inverting input terminal and an output terminal of the amplifier 355. A further capacitor 365 and a resistor 370 are connected in series; the elements 365,370 are arranged in parallel to the  
 10 capacitor 360, so as to define a filter. The output terminal of the amplifier 355 provides the control voltage  $V_c$ .

Every reference cycle, the enabling signal  $\Phi_1$  is at first asserted (with the enabling signal  $\Phi_2$  that is deasserted). In this way, the switches 325 and the switch  
 15 345 are closed (while the switches 315 and the switch 350 are opened). In an ideal condition, the charge stored in the capacitors 320 (as described in the following) is instantaneously transferred to the capacitor 340. The capacitor 340 is then charged by the currents  $I_p$  and  $I_o$ . The  
 20 enabling signal  $\Phi_1$  is kept asserted for a time interval (for example, half a period of the reference signal  $V_r$ ) corresponding to the first phase.

The enabling signal  $\Phi_1$  is then deasserted (opening the switches 325 and the switch 345), and the enabling signal  $\Phi_2$   
 25 is asserted after a short delay (so that the signals  $\Phi_1$  and  $\Phi_2$  are discoveredlapped). In this way, the signals output by the AND-gates 330 receiving the scrambled bits  $b_0$ - $b_{15}$  at 1 are asserted, and the corresponding switches 315 are closed (while the switches 315 associated with the scrambled bits  
 30  $b_0$ - $b_{15}$  at 0 remain open). The capacitors 320 associated with the scrambled bits  $b_0$ - $b_{15}$  at 1 are then charged to the power

supply voltage  $\pm V_{dd}$  (so that the total electric charge that will be transferred to the capacitor 340 during the next first phase is proportional to the correction value  $N_c$ ). At the same time, the switch 350 is closed; in this way, the electric charge accumulated in the capacitor 340 during the first phase (due to the currents  $I_p, I_o$  and to the correction value  $N_c$ ) is transferred to the capacitor 360 in the loop-filter 140. The enabling signal  $\Phi_2$  is then deasserted, thereby terminating the second phase.

In the above-describe architecture, the conversion of the correction value  $N_c$  is performed exploiting multiple identical components, which exhibit a high linearity. Moreover, when the scrambler 310 implements the random algorithm the capacitors 320 are statistically used with an even frequency; conversely, when the scrambler 310 implements the barrel shift algorithm the capacitors 320 are used in succession. In both cases, the periodic effects caused by the non-linearity of the servo-DAC 125 are substantially limited; as a result, any folding of the spurs is avoided, thereby reducing their power near the carrier.

Moving now to Figure 3b (the elements corresponding to the ones shown in the Figure 3a are denoted with the same references, and their explanation is omitted for the sake of simplicity), an alternative implementation of the invention is illustrated. In this case, the AND-gates 330 receive the enabling signal  $\Phi_1$ , while the switches 325 are controlled by the enabling signal  $\Phi_2$ . The common node of the switches 325 is connected directly to the loop-filter 140 (without any operational amplifier and associated capacitor). The conditioning block 135 includes a further capacitor 375 having a first terminal that is kept at ground. A second

terminal of the capacitor 375 is alternatively connected to the output node of the charge-pump 120 (through the switch 345) or to the loop-filter 140 (through the switch 350).

During the first phase (enabling signal  $\Phi_1$  asserted and enabling signal  $\Phi_2$  deasserted), the switch 345 is close; in this way, the capacitor 375 is charged by the currents  $I_p$  and  $I_o$ . At the same time, the switches 315 associated with the scrambled bits  $b_0$ - $b_{15}$  at 1 are close, so that the corresponding capacitors 320 are charged to the power supply voltage  $\pm V_{dd}$ . During the second phase (enabling signal  $\Phi_1$  deasserted and enabling signal  $\Phi_2$  asserted), the switches 325 and the switch 350 are close (while the switches 315 and the switch 345 are open). In this way, the electric charge stored in the capacitor 375 (due to the currents  $I_p$  and  $I_o$ ) and the electric charge stored in the capacitors 320 (due to the correction value  $N_c$ ) are transferred to the capacitor 360 in loop-filter 140.

However, the concepts of the present invention are also applicable when the servo-DAC and/or the loop-filter have another structure or include equivalent components. Similar considerations apply if different thermometric representations and/or scrambling algorithms are employed; for example, two distinct paths are provided for positive correction values and for negative correction values, respectively (when the PLL is implemented with a multi-bit modulator).

More generally, the present invention proposes a phase-locked loop circuit, which is used for providing an output signal having a frequency depending on the frequency of a reference signal. The circuit includes means for deriving a feedback signal from the output signal. Further means are

used for providing a control signal indicative of a phase difference between the reference signal and the feedback signal. The frequency of the output signal is controlled according to the control signal. Moreover, means are  
5 provided for conditioning the control signal through one or more conditioning signals. In the circuit of the invention, the means for conditioning includes means for accumulating an energy provided by the control signal and the conditioning signals during a first phase; the accumulated  
10 energy is then transferred to the means for controlling the frequency of the output signal during a second phase.

The solution of the invention allows a perfect conditioning of the control current (or any equivalent signal); particularly, the current provided to the means  
15 that are used for controlling the frequency of the output signal has an instantaneous value that is always zero in the lock condition.

In this way, any conditioning technique can be implemented in the PLL without affecting the level of the  
20 reference spurs (as in the structures known in the art).

Therefore, the devised solution results in an improvement of the overall performance of the PLL.

The preferred embodiment of the invention described above offers further advantages.

25 Particularly, the devised solution is based on the switched-capacitor technique.

This technique makes it possible to achieve the desired result with a very simple implementation.

30 However, the use of alternative techniques for accumulating energy and for transferring the accumulated energy during different operative phases of the PLL is



contemplated.

Without detracting from the general applicability of the invention, the devised solution is particularly advantageous for compensating the phase errors in fractional  
5 PLLs.

The proposed conditioning scheme substantially deletes all the fractional spurs (without increasing the level of the reference spurs).

As a further enhancement, the servo-DAC (of the  
10 switched-capacitor type) and the conditioning block are controlled by the same enabling signals.

This structure makes it possible to exploit signals that are already available in the PLL.

In a proposed implementation of the invention, the  
15 output capacitor of the servo-DAC is also used for accumulating the electric charge provided by the control current (and the linearization current).

In another embodiment, all the input capacitors of the servo-DAC are directly connected to the loop-filter (with a  
20 dedicated capacitor for the control current and the linearization current).

Both structures reduce the number of additional components that are needed for putting the invention into practice.

25 However, the implementation of the solution according to the present invention is not excluded even in a PLL of the integer type or in a PLL without any frequency divider (always outputting a signal having the same frequency as the reference signal). Alternatively, the conditioning block is  
30 implemented in another way, the conditioning block and the servo-DAC exploit distinct enabling signals, or the servo-

DAC has another architecture.

A way to further improve the solution is to convert the representation of the correction value into a thermometric code.

5       The proposed feature increases the linearity of the servo-DAC.

Advantageously, the thermometric bits representing the correction value are scrambled.

10       The devised solution reduces any periodic effect in the conditioning current.

However, the solution according to the present invention is suitable to be implemented with a different servo-DAC, and even without any conversion of the correction value and/or any scrambling of the thermometric bits.

15       In addition or in alternative, the solution of the invention is used for reducing the effects of the non-linearity of the phase comparator (PFD and charge pump).

Even in this case, the proposed conditioning scheme does not affect the level of the reference spurs.

20       However, the solution of the invention leads itself to be implemented with the compensation current or the linearization current only, with additional currents, or with any other signal for conditioning the control current.

25       Naturally, in order to satisfy local and specific requirements, a person skilled in the art may apply to the solution described above many modifications and alterations all of which, however, are included within the scope of protection of the invention as defined by the following claims.

30

CLAIMS

1. A phase-locked loop circuit (100) for providing an output signal having a frequency depending on the frequency of a reference signal, the circuit including means (105-110) for deriving a feedback signal from the output signal, means (115-120) for providing a control signal indicative of a phase difference between the reference signal and the feedback signal, means (140-145) for controlling the frequency of the output signal according to the control signal, and means (125-135) for conditioning the control signal through at least one conditioning signal,

characterized in that the means for conditioning includes means (135) for accumulating an energy provided by the control signal and the at least one conditioning signal during a first phase and for transferring the accumulated energy to the means for controlling the frequency of the output signal during a second phase.

2. The circuit (100) according to claim 1, wherein the means for conditioning (205-215) includes capacitive means (205), first switching means (210) responsive to a first enabling signal for coupling the capacitive means with the means for providing the control signal (115-120) during the first phase, and second switching means (215) responsive to a second enabling signal for coupling the capacitive means with the means for controlling the frequency of the output signal (140-145) during the second phase.

3. The circuit (100) according to claim 1 or 2, wherein the phase-locked loop circuit is of the fractional type for synthesizing the output signal multiplying the frequency of

the reference signal by a fractional conversion factor, the means for deriving the feedback signal (105-110) including means (105) for dividing the frequency of the output signal by a dividing ratio being modulated to provide the  
 5 conversion factor on the average, and wherein the means for conditioning (125-135) includes means (125) for providing a first conditioning signal for compensating a phase error caused by the modulation of the dividing ratio, the control signal consisting of a series of pulses modulated according  
 10 to a first technique and the first conditioning signal consisting of a series of pulses modulated according to a second technique.

4. The circuit (100) according to claim 3, further including means (110) for providing a correction value  
 15 indicative of the phase error, the correction value consisting of at least one bit, and wherein the means for providing the first conditioning signal includes a digital-to-analog converter (125) of a switched-capacitor type for converting the correction value into the first conditioning  
 20 signal, the converter being controlled by the first and the second enabling signals.

5. The circuit (100) according to claim 4, wherein the converter (125) includes an output capacitor (340) and, for each bit of the correction value, an input capacitor (320),  
 25 a first switch (315) for connecting the input capacitor to a power supply source in response to the second enabling signal and the corresponding bit, and a second switch (325) for connecting the input capacitor to the output capacitor in response to the first enabling signal, the conditioning  
 30 means (135) including a further first switch (345) for connecting the output capacitor to the means for providing

the control signal (115-120) in response to the first enabling signal and a further second switch (350) for connecting the output capacitor to the means for controlling the frequency of the output signal (140-145) in response to the second enabling signal.

6. The circuit (100) according to claim 4, wherein the converter (125) includes, for each bit of the correction value, an input capacitor (320), a first switch (315) for connecting the input capacitor to a power supply source in response to the first enabling signal and the corresponding bit, and a second switch (325) for connecting the input capacitor to the means for controlling the frequency of the output signal (140-145) in response to the second enabling signal, the conditioning means (135) including a further capacitor (175), a further first switch (345) for connecting the further capacitor to the means for providing the control signal (115-120) in response to the first enabling signal, and a further second switch (350) for connecting the further capacitor to the means for controlling the frequency of the output signal (140-145) in response to the second enabling signal.

7. The circuit (100) according to any claim from 4 to 6, wherein the correction value consists of a plurality of bits, the converter (125) further including means (305) for converting the bits of the correction value into a plurality of thermometric bits of even weight.

8. The circuit (100) according to claim 7, wherein the converter (125) further includes means (310) for scrambling the thermometric bits.

9. The circuit (100) according to any claim from 1 to 8, wherein the means for conditioning (125-135) includes

means (130) for providing a second conditioning signal for causing the circuit to enter a lock condition when the reference signal and the feedback signal have the same frequency and a pre-defined phase difference, the control  
5 signal consisting of a series of pulses and the second conditioning signal having a constant amplitude corresponding to the pre-defined phase difference.

10. In a fractional-type phase-locked loop circuit, a method of providing an output signal having a frequency  
10 depending on the frequency of a reference signal, the method including the steps of:

deriving a feedback signal from the output signal,  
providing a control signal indicative of a phase  
difference between the reference signal and the feedback  
15 signal,

controlling the frequency of the output signal according to the control signal, and

conditioning the control signal through at least one conditioning signal,

20 characterized in that the step of conditioning includes:

accumulating an energy provided by the control signal and the at least one conditioning signal during a first phase, and

transferring the accumulated energy for controlling the  
25 frequency of the output signal during a second phase.

ABSTRACTA PHASE-LOCKED LOOP CIRCUIT WITH SWITCHED-CAPACITOR  
CONDITIONING OF THE CONTROL CURRENT

5

A phase-locked loop circuit (100) is proposed for providing an output signal having a frequency depending on the frequency of a reference signal, the circuit including means (105-110) for deriving a feedback signal from the output signal, means (115-120) for providing a control signal indicative of a phase difference between the reference signal and the feedback signal, means (140-145) for controlling the frequency of the output signal according to the control signal, and means (125-135) for conditioning the control signal through at least one conditioning signal; in the circuit of the invention, the means for conditioning includes means (135) for accumulating an energy provided by the control signal and the at least one conditioning signal during a first phase and for transferring the accumulated energy to the means for controlling the frequency of the output signal during a second phase.

(Figure 2)

**THIS PAGE BLANK (USPTO)**



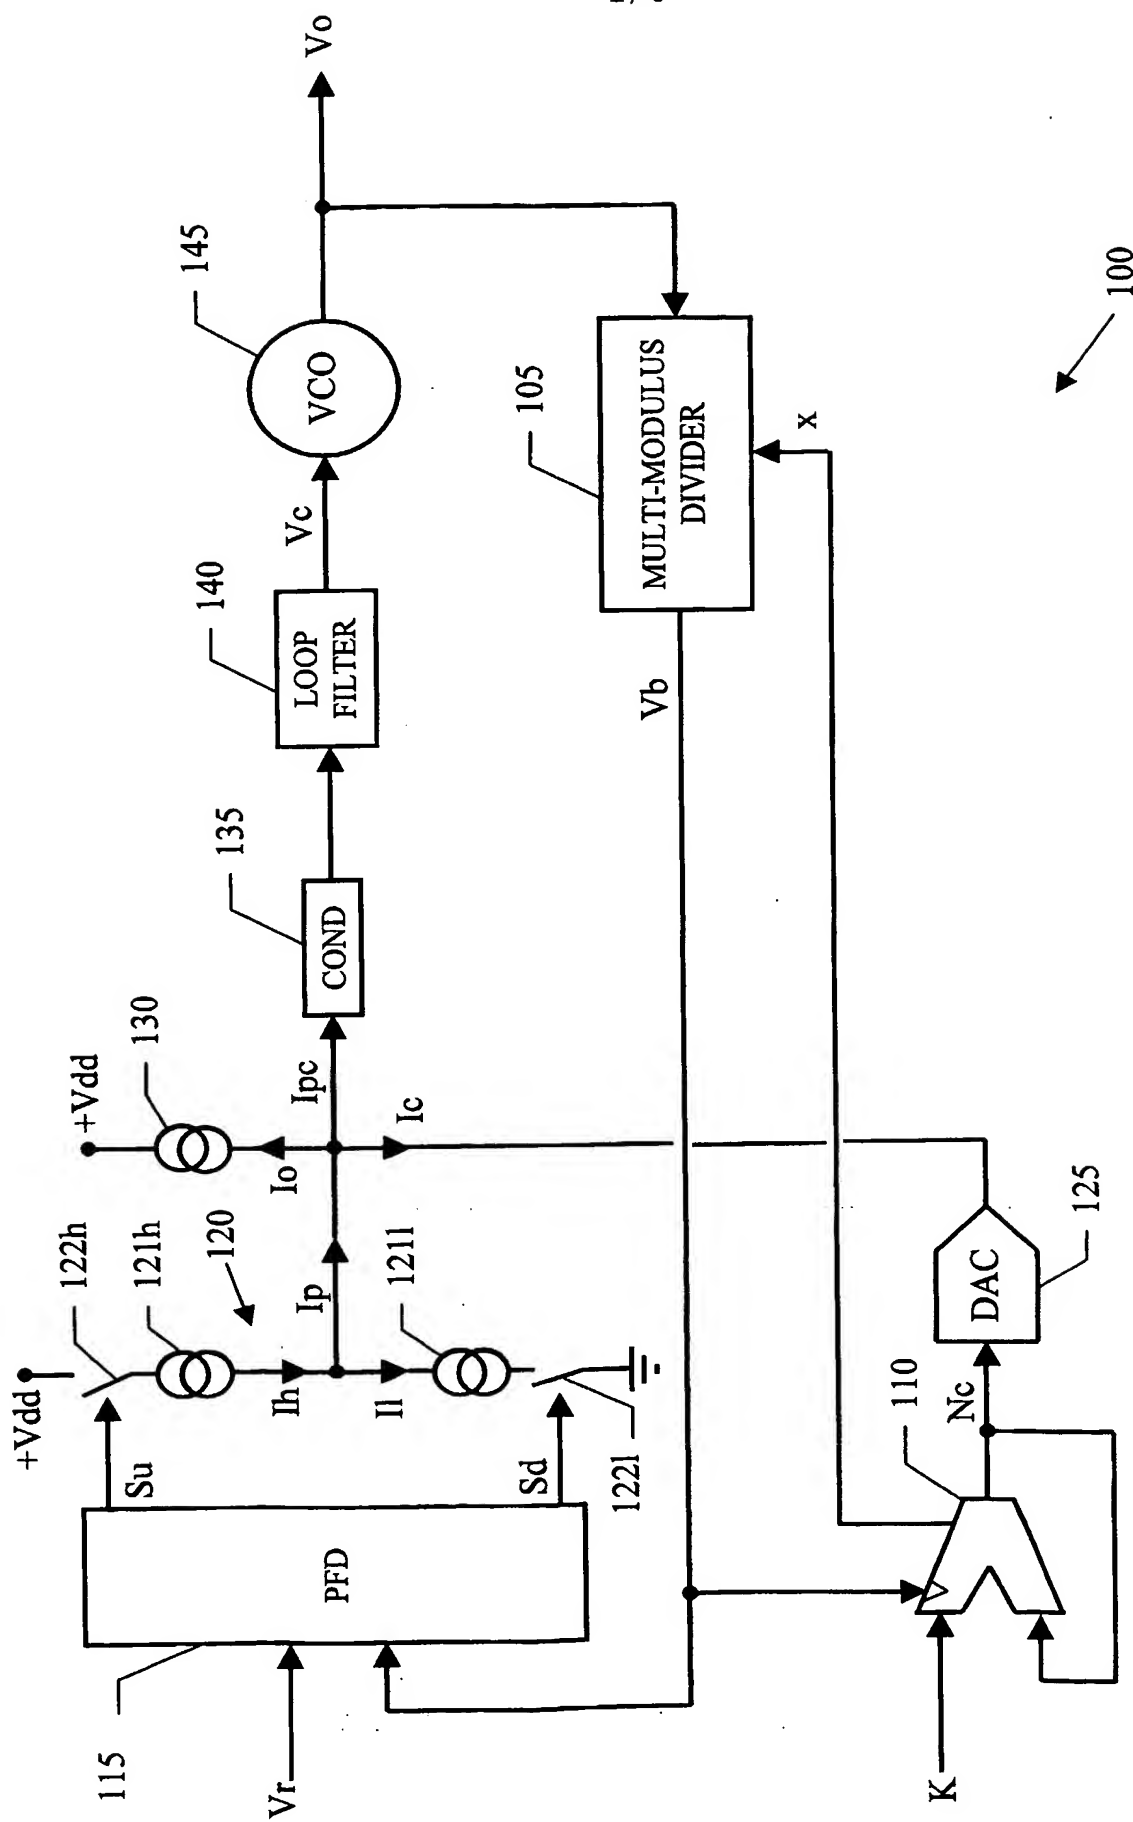
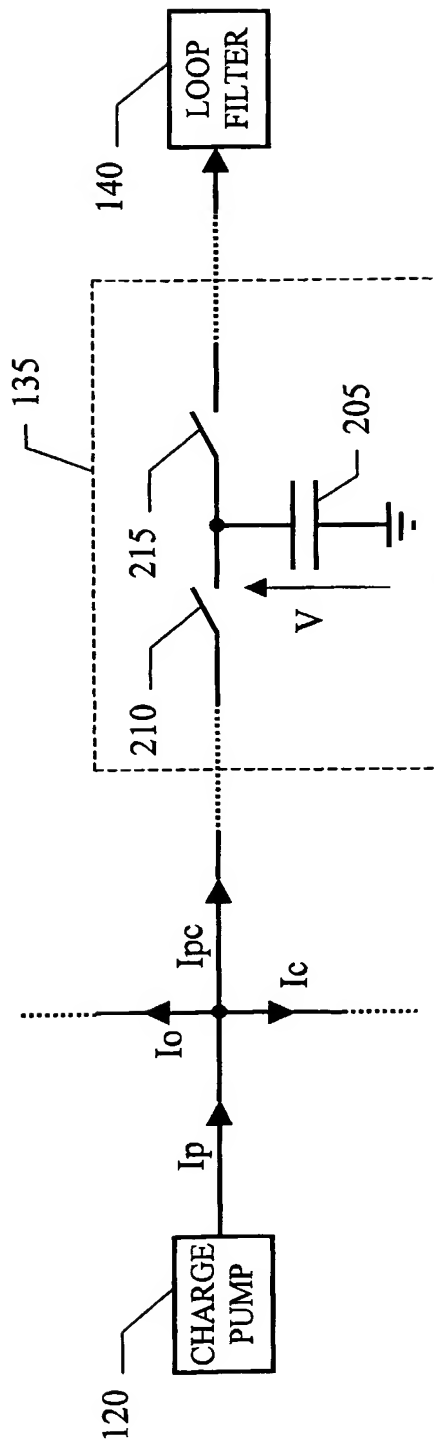
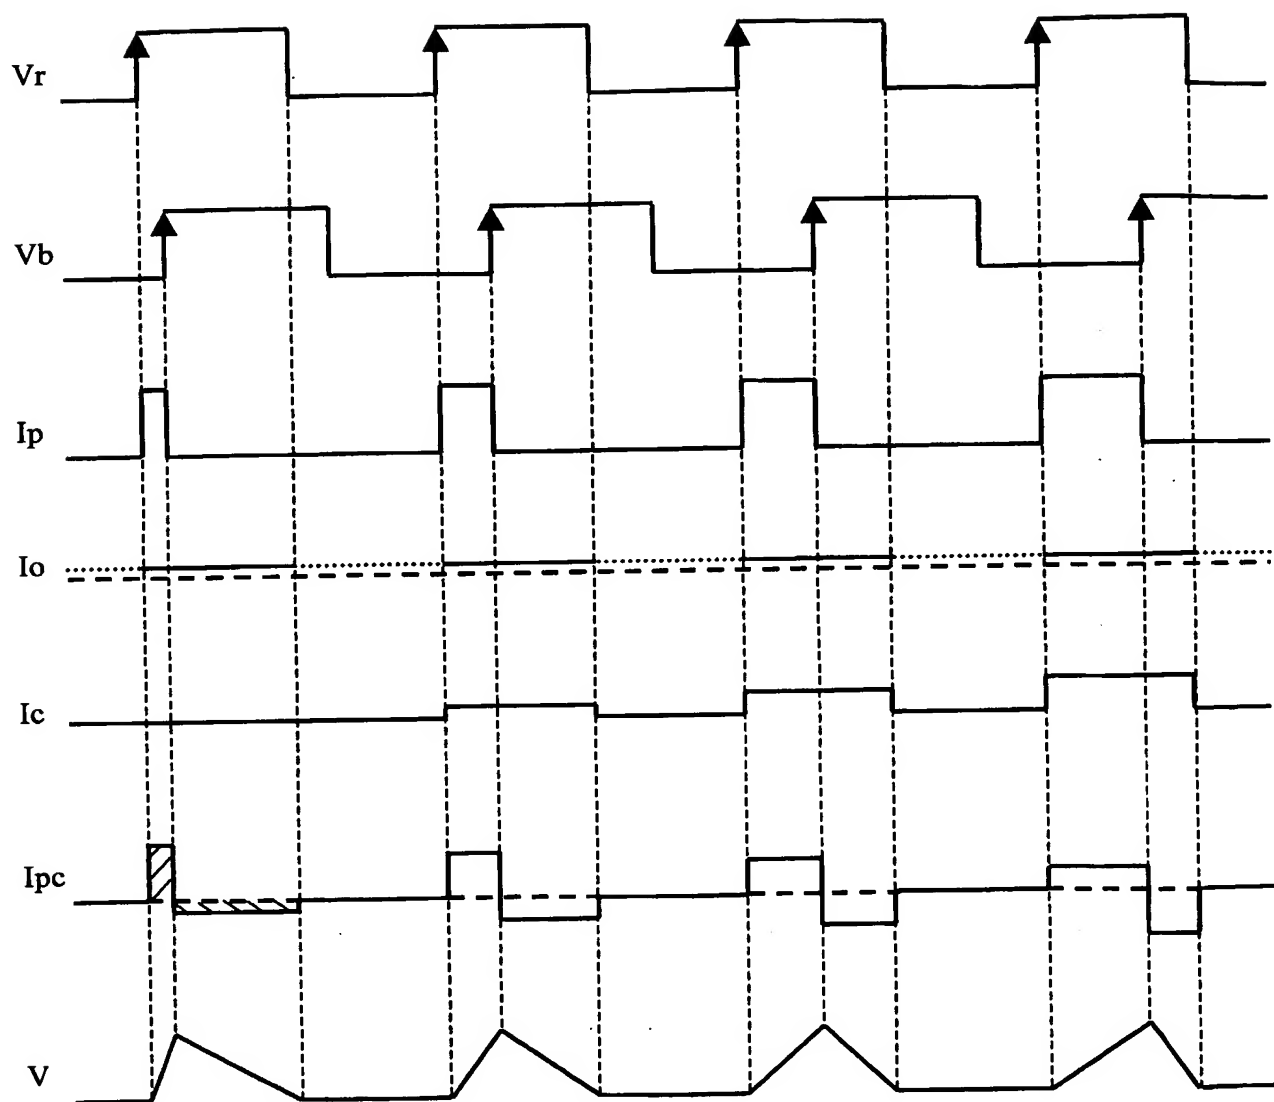


FIG.1

FIG.2a

FIG.2b

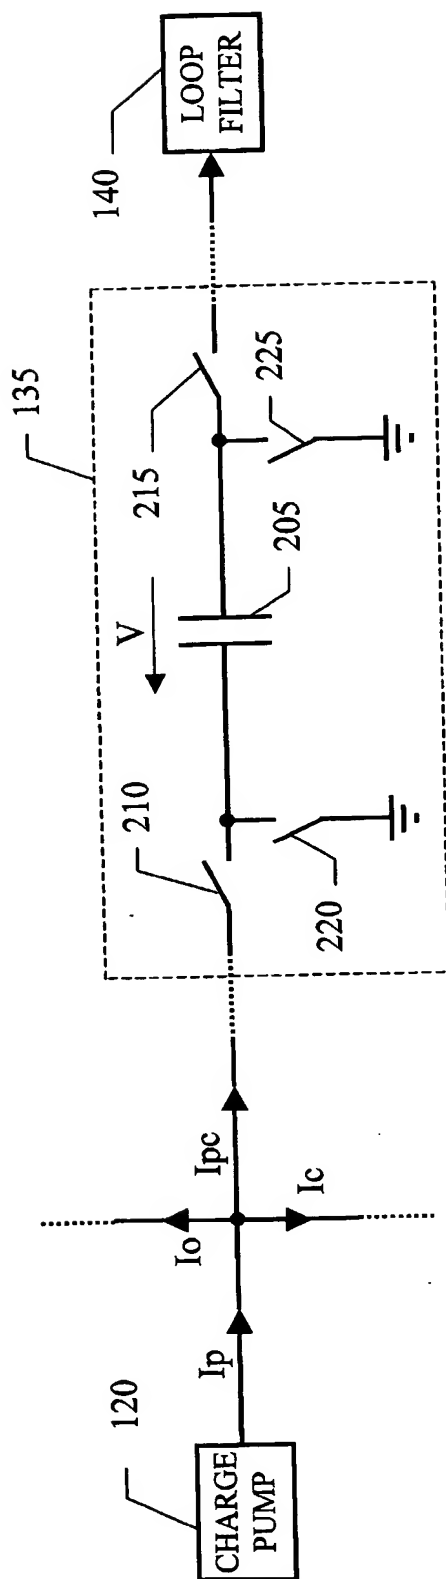


FIG.2c

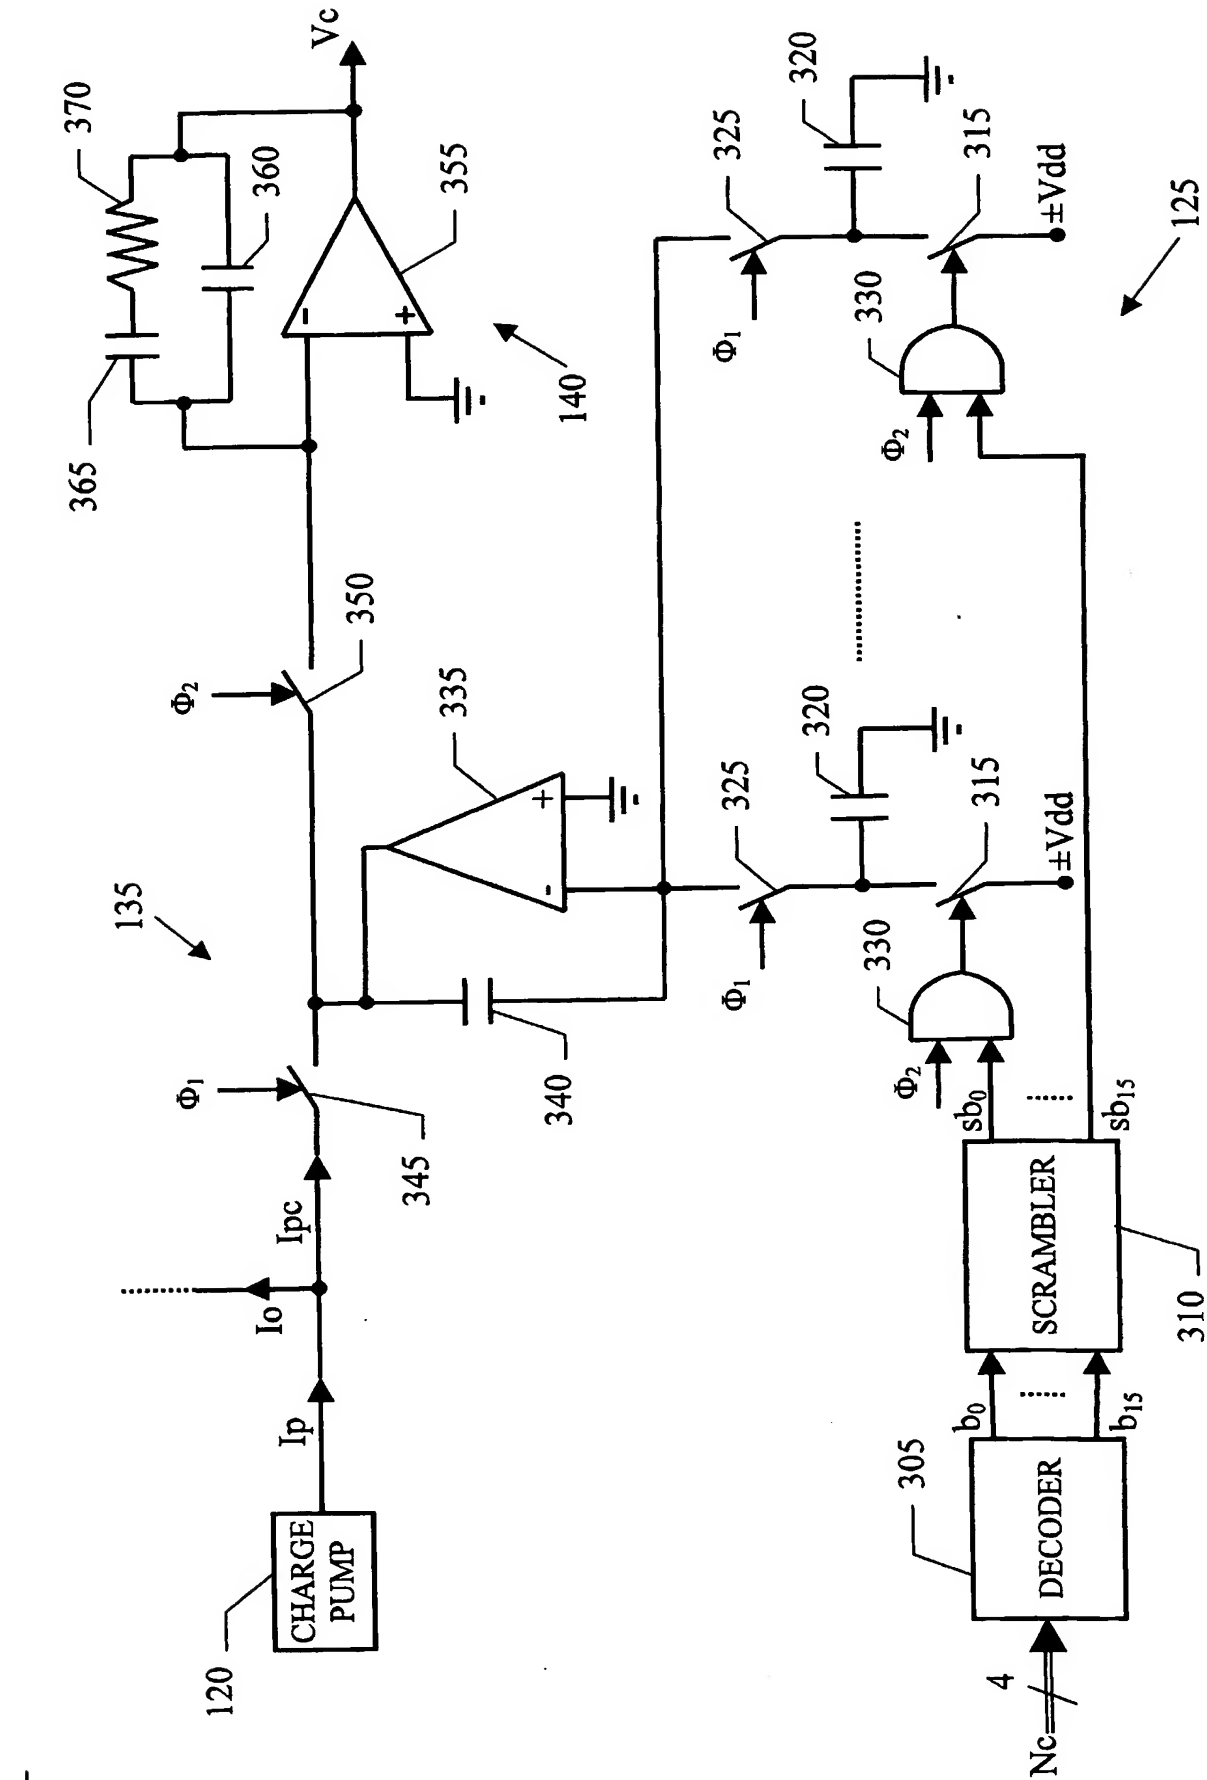


FIG.3a

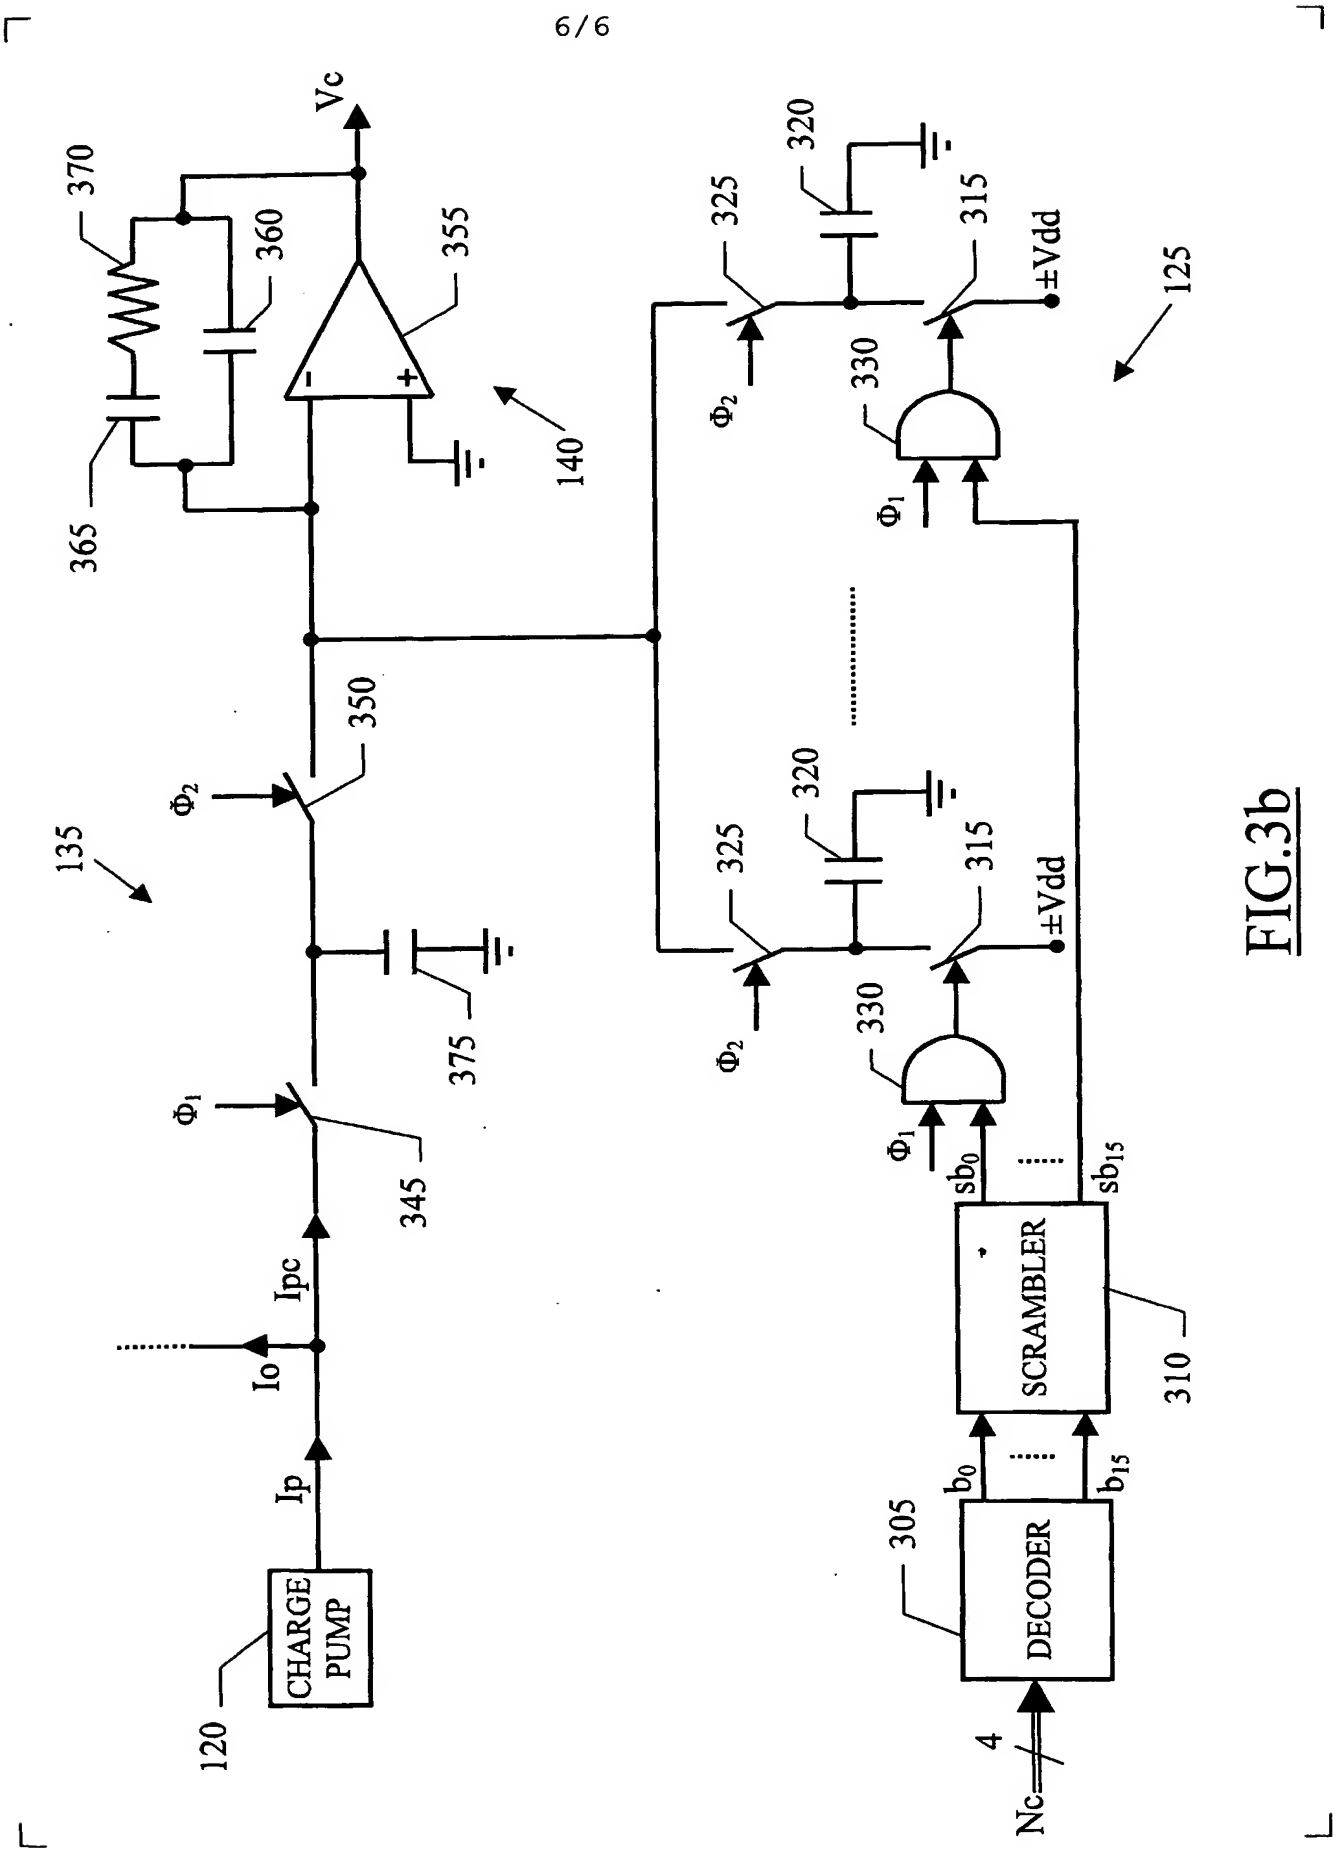


FIG.3b